


Glue laminated solid timber DUO/TRIO HNT ceiling system

Produced according to ONORM EN 386 (rules of OIB)

Adhesive: melamin urea glue (MUF).


Surface: 4 sides planed, edges chamfered

Standard length: 13.0 m

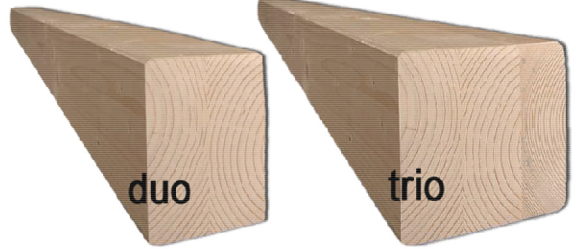

height max.	to	mc	to	mc	to	mc	to	mc	to	mc	to	mc	
	pp	cm	pp	cm	pp	cm	pp	cm	pp	cm	pp	cm	
240 mm					1,7	3,89			2,7	6,22	2,6	5,83	
					10	120*24			12	96*48	10	90*48	
200 mm	2,7	6,05	2,9	6,48	2,9	6,48	2,7	6,05	2,7	6,05	2,6	5,83	
	28	112*40	24	120*40	20	120*40	16	120*40	14	112*40	12	108*40	
180 mm	2,4	5,44	2,6	5,83	2,6	5,83					2,3	5,25	
	28	112*36	24	120*36	20	120*36					12	108*36	
160 mm	2,1	4,84	2,3	5,18	2,3	5,18							
	28	112*32	24	120*32	20	120*32							
140 mm	1,9	4,23	2,0	4,54									
	28	112*28	24	120*28									
120 mm	1,6	3,63											
	28	112*24											
100 mm	1,3	3,02											
	28	112*20											
width	80 mm	DUO	100 mm	DUO	120 mm	DUO	140 mm	DUO	160 mm	DUO	180 mm	TRIO	

beams for blockhouses

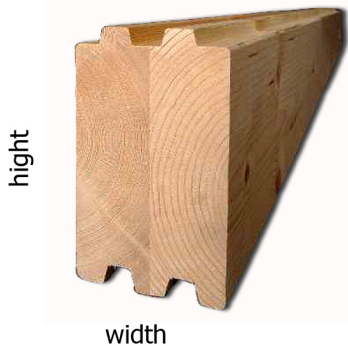

width: 120 and 160 mm (100/140 mm can be separated)

height: 200 and 240 mm

covering measure: - 15 mm

thickness 80 mm 1 groove and tongue
 thickness 100 - 140 mm 2 grooves and tongues
 thickness 160 - 180 mm 3 grooves and tongues
 thickness 200 up tp 240 mm 4 grooves and tongues

minimum quantity of one cross section: 15 m³

surcharge: + € 20,00/m³ for groove and tongue on price of glue-laminated timber resp. price of DUO/TRIO